


# Q COUPLER

PRESSED 50MM (2") TURNTABLE

High Tensile steel top plate and heavy duty interlaced understructure for superior strength

York proven hook and plunger provides safe and reliable locking mechanism

Independent grease points for top plate, plunger and neck of Kingpin

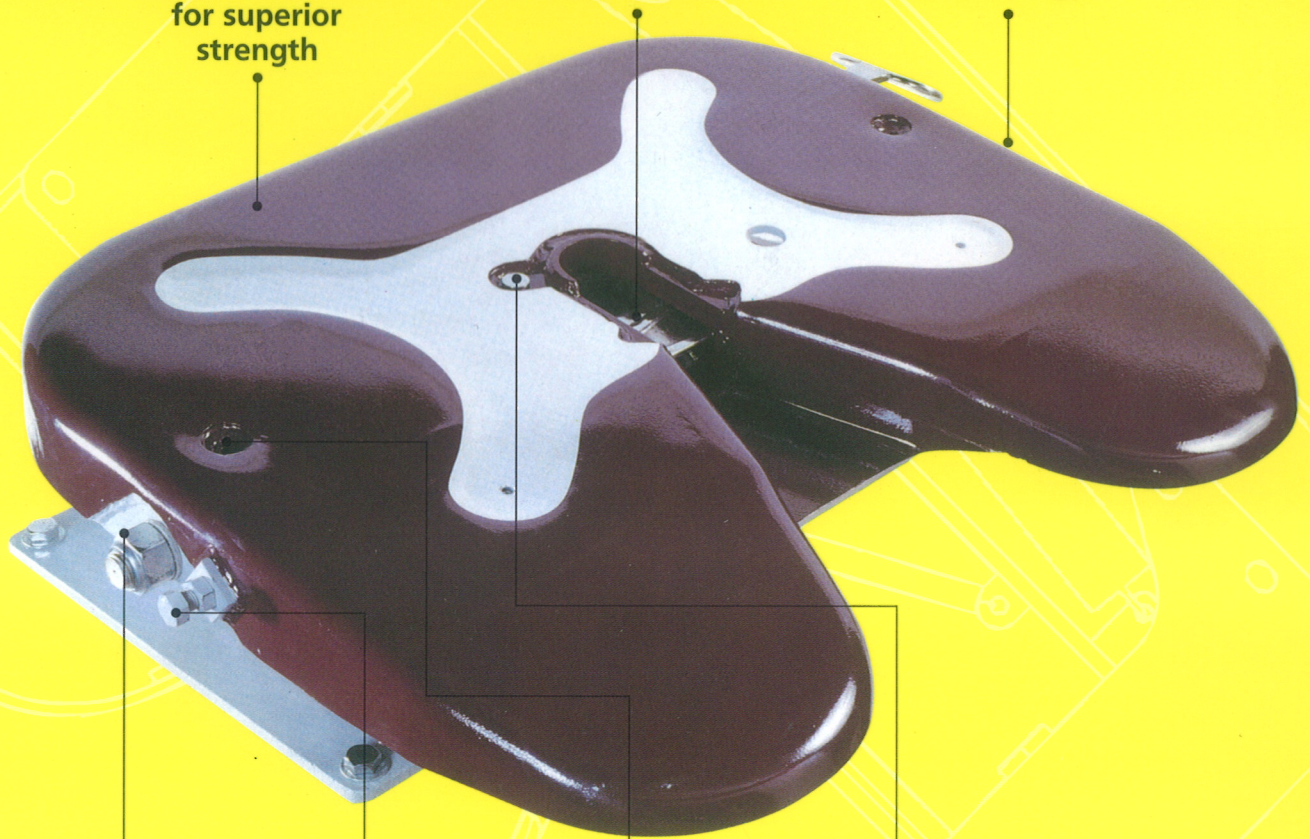

Bonded synthetic rubber bush for longer service life

Adjustable rod for ease of plunger adjustment

Saddle welded to top plate for maximum strength

Hook pivot can be moved from above

# Q COUPLER

PRESSED 50MM (2") TURNTABLE

**COMPLIES WITH  
ISO STANDARDS AND  
AUSTRALIAN STANDARD  
AS 1773 - 1990**

**Vertical Load - 20,000kg**

**D Value - 165kn**

**Tare Weight - 140kg**

Vertical mounting heights available

**Dim H** = 150mm  
= 180mm  
= 210mm

The **YORK Q Coupler** is designed to operate under the most arduous conditions. With the assistance of finite element analysis and many years of operational experience, this turnable has proven to be durable giving safe operation with easy maintenance characteristics.

- Positive action - no half coupling
- Secure automatic locking
- Heavy duty rubber bushes
- Wear adjustable by external screw

